

2019 Scheduled Sewer Rehabilitation...

2 views

All changes saved in Drive


Add layer + Share Preview

Untitled layer

Individual styles

- SL 12, Rideau Street
- SL 11, Rideau Street
- SL 1, Sanders Street
- SL 7, Elvira Street
- SL 5, Dodson Street
- SL 10, Maley Street
- SL 8, Oxford Street
- SL 2, Parliament Street
- SL 6, Georgiana Street
- SL 4, George Street East
- SL 9, Barnes Street

Base map

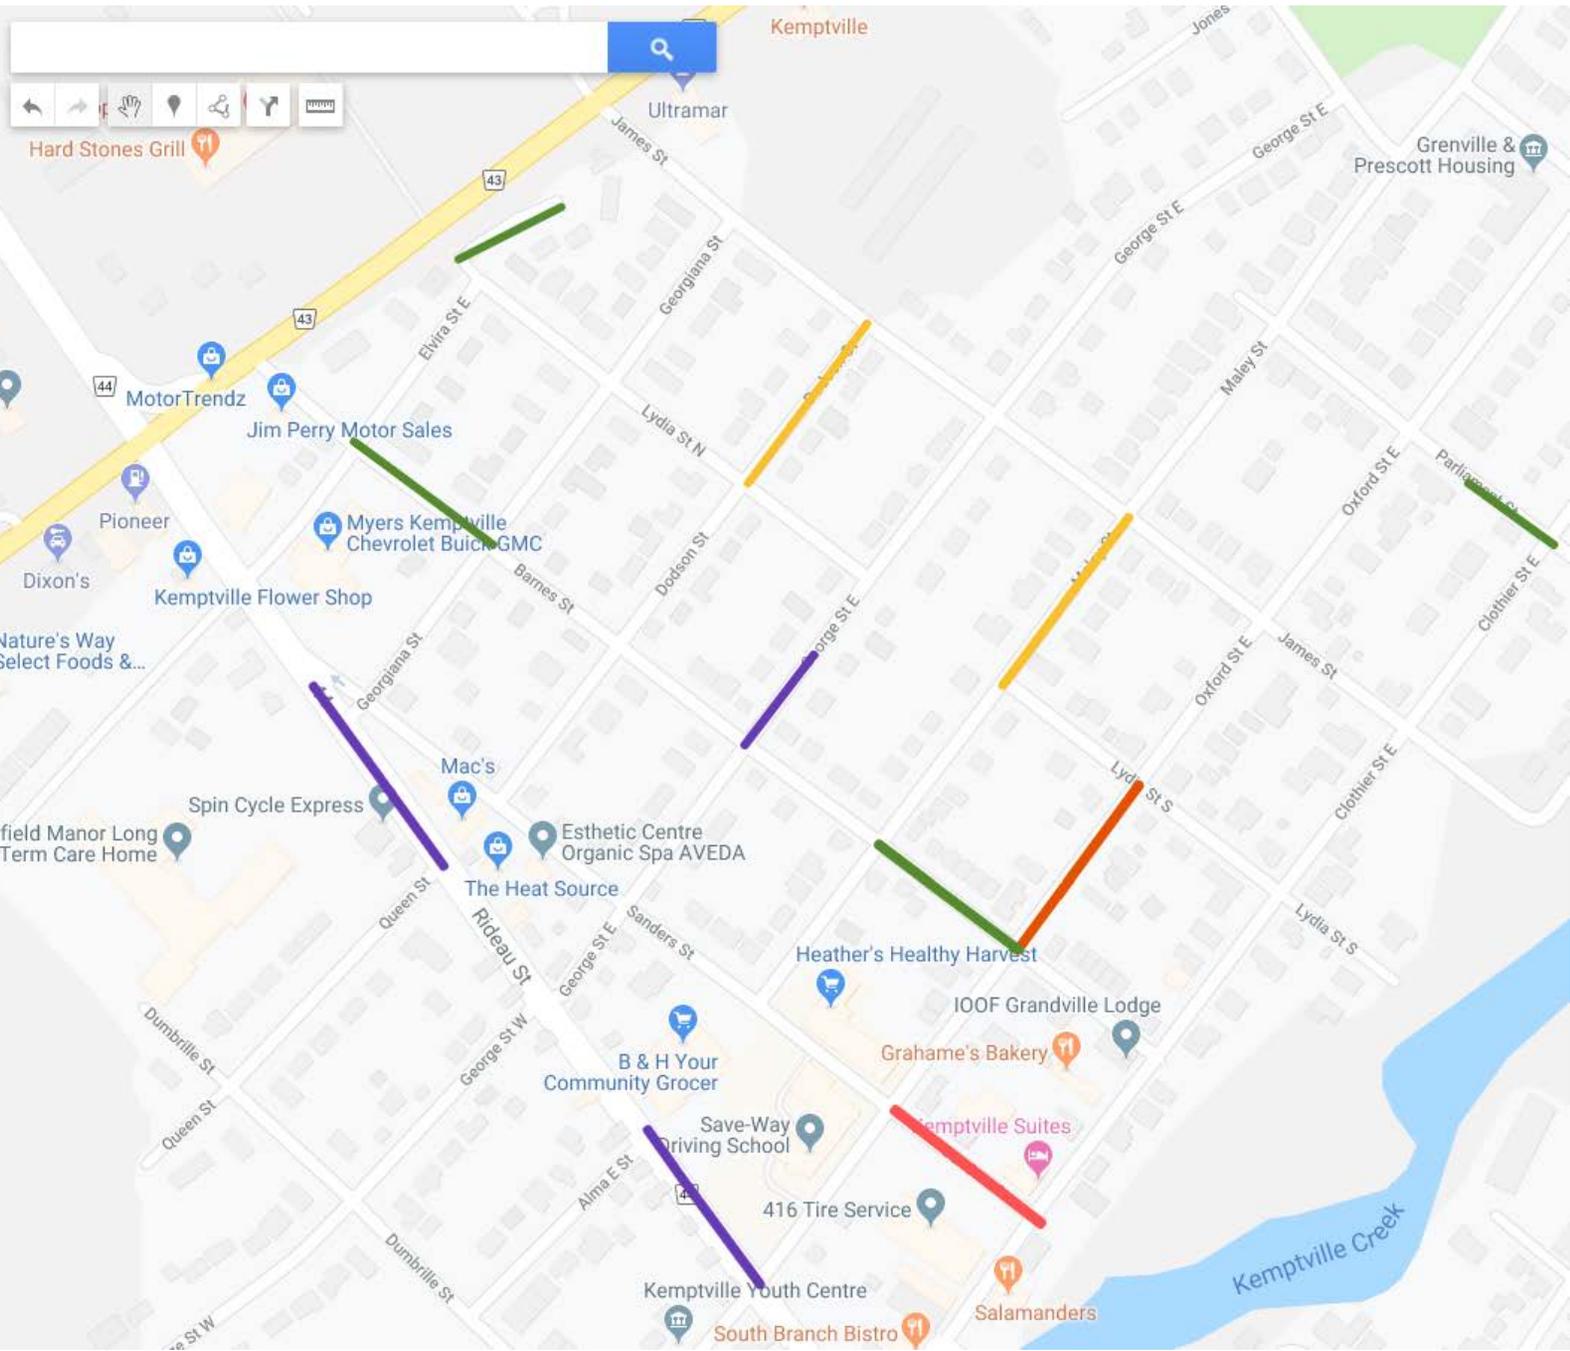

Install Date	Job #	SL #	Street name
Mon, Sep 09, 2019	L19018	1	Sanders Street
Tue, Sep 10, 2019	L19018	4	George Street East
Wed, Sep 11, 2019	L19018	5	Dodson Street
Thu, Sep 12, 2019	L19018	6	Georgiana Street
Thu, Sep 12, 2019	L19018	9	Barnes Street
Wed, Sep 18, 2019	L19018	8	Oxford Street
Thu, Sep 19, 2019	L19018	11	Rideau Street
Thu, Sep 19, 2019	L19018	12	Rideau Street
Mon, Sep 23, 2019	L19018	10	Maley Street
Tue, Sep 24, 2019	L19018	2	Parliament Street
Tue, Sep 24, 2019	L19018	7	Elvira Street

IMPORTANT NOTICE

TEMPORARY INTERRUPTION OF YOUR SEWER SERVICE

CONTRACT NO. 19EN480259 NG19-22 SEWER REHABILITATION

Dear Resident,

The **Municipality of North Grenville** has contracted **Clean Water Works Inc.** to rehabilitate the main sewers under your street using the Cured-in-Place (CIPP) process (a no-dig method of sewer pipe repair by lining which consists of inserting a liner into the sewer main to render it structural and watertight). While not much can be seen from the surface, specialized equipment are used to perform the underground work. This sewer rehabilitation technology minimizes all inconveniences usually associated with conventional open cut sewer repairs.

To carry out a sewer rehabilitation by lining, the house drains connecting to the sewer main must be temporarily sealed for several hours.

As part of this work, your sewer service will be blocked at the main and out of service:

September 09th to September 20th from 8 AM to 6 PM

Although the water supply will not be affected during this time, we ask that you avoid discharging water into your drain. Please, minimize your water usage as follows:

- **Do not use showers, bath tubs, sinks, dishwashers or laundry washers;**
- **Keep toilet flushing to a minimum.**

These measures will reduce the possibility of sewage flows backing up into the basement or plumbing. If you have a **sump pump**, please temporarily disconnect during the work period and restart it when the work will be done.

ODOURS

Odours resulting from the resin used to line the sewer may be noticeable during the work. Although this **harmless odour** may be noticeable at very low levels, it presents no risk to human health. In order to mitigate this normal occurrence, if your residence is in the work area, please follow the steps as indicated in the diagrams below **and ensure that you have water in your plumbing P-traps by pouring water in each drain before work**. It is recommended that residents locate all drains and ensure that the building's plumbing is in good condition.



During the construction period, make sure to pour at least a litre of water in each of your floor drains (basement) and in all sinks and shower drains in your home or apartment.

NOISE

Since the time required to rehabilitate a pipe depends on the pipe diameter, length and the number of services to be connected to the sewer main, noise may be occasionally caused by the equipment late at night.

TRAFFIC AND PARKING

During the work, traffic and parking restrictions may be applied in the area. At all times, pedestrian access to the homes and establishments will be preserved. Thank you for your patience and cooperation during this time.

PROBLEM OR QUESTIONS

Clean Water Works Inc.
Troy McCarney, Superintendent
Cellular (416) 577-2877
Jean-Pierre Gbegan, Project Manager
Mobile: (514) 703-4802

Municipality of North Grenville
Ashley Stewart
Contact Number: (613) 258-9569 ext. 138